


SUNON®

High air flow ✓
High efficiency ✓
Smart Connect ✓



Green EC Fan in Precision and Data Center Cooling


Fan wall



EC 500
EC 560
EC 630



EC 710
EC 800
EC 910

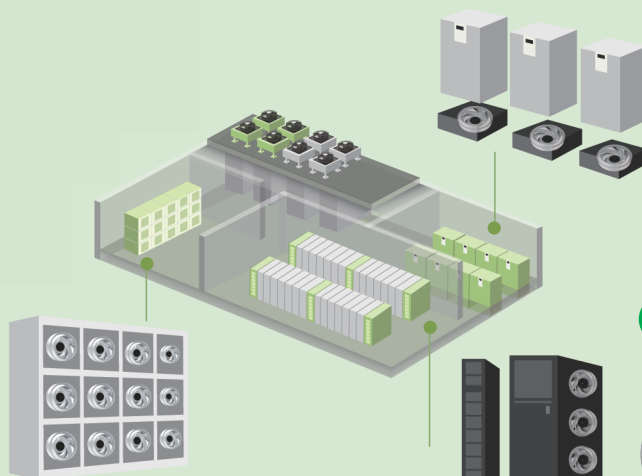

Room cooling



EC 500
EC 560
EC 630

Row cooling



EC 355
EC 400




www.sunon.com
E-mail: sunon@sunon.com

2026/09/01 (275-E)

© 2026 SUNONWEALTH Electric Machine Industry Co., Ltd.

Axial Fan Series

	Part Number	Rated Voltage (VAC)	Freq. (Hz)	Max. Current draw (A)	Max. Power Consumption (W)	Fan Speed (RPM)	Ambient temperature (°C)	Noise @ free air
EC710	CFAP576MH-1000U-IJ9	3~380-480	50/60	5.80	3,800	1,680	-25 ~ +60	86.0 dBA
EC800	CFAP586NH-1000U-IJ9	3~380-480	50/60	5.79	3,460	1,160	-25 ~ +60	90.0 dBA
EC910	CFAP596PH-1000U-IJ9	3~380-480	50/60	5.15	2,989	1,080	-25 ~ +60	82.0 dBA

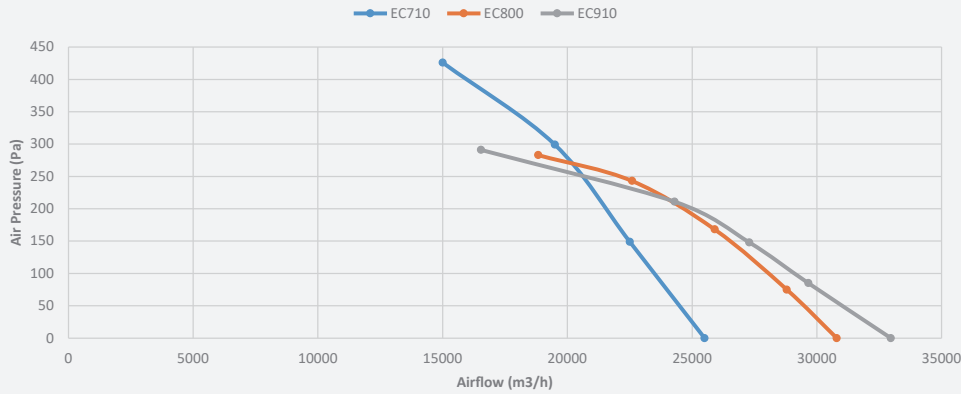

Centrifugal Fan Series

	Part Number	Rated Voltage (VAC)	Freq. (Hz)	Max. Current draw (A)	Max. Power Consumption (W)	Fan Speed (RPM)	Ambient temperature (°C)	Noise @ free air
EC355	CBAA335ME-1000U-IJ9	1~200-277	50/60	2.28	519	2,280	-25~+60	83.0 dBA
	CBIA335LE-1000U-IJ9	1~200-277	50/60	2.28	519	2,280	-25~+60	83.0 dBA
	CBAP535MG-1000U-IJ9	3~380-480	50/60	2.50	1,500	2,500	-40~+40	91.0 dBA
	CBIP535LG-1000U-IJ9	3~380-480	50/60	2.50	1,500	2,500	-40~+40	91.0 dBA
	CBAP535NG-1000U-IJ9	3~380-480	50/60	6.12	3,700	6,120	-40~+40	105.8 dBA
	CBIP535MG-1000U-IJ9	3~380-480	50/60	6.12	3,700	6,120	-40~+40	105.8 dBA
EC400	CBAP540NG-1000U-IJ9	3~380-480	50/60	2.53	1,500	2,530	-40~+40	92.0 dBA
	CBIP540MG-1000U-IJ9	3~380-480	50/60	2.53	1,500	2,530	-40~+40	92.0 dBA
EC500	CBAP550PH-1000U-IJ9	3~380-480	50/60	4.72	2,835	1,940	-25~+60	91.0 dBA
	CBIP550NH-1000U-IJ9	3~380-480	50/60	4.72	2,835	1,940	-25~+60	91.0 dBA
EC560	CBAP556SH-1000U-IJ9	3~380-480	50/60	7.06	4,172	7,060	-25~+60	92.0 dBA
	CBIP556RH-1000U-IJ9	3~380-480	50/60	7.06	4,172	7,060	-25~+60	92.0 dBA
EC630	CBAP563SH-1000U-IJ9	3~380-480	50/60	6.67	4,229	6,670	-25~+50	90.0 dBA
	CBIP563RH-1000U-IJ9	3~380-480	50/60	6.67	4,229	6,670	-25~+50	90.0 dBA

